



PRODUCT INFO


DESIGNATION
heligás butano

PRODUCT CODE
140 189

MATERIALS
Flexible PVC.

STANDARDS

O heligás butano é fabricado segundo a norma EN 16436-1:2014+A3:2020. Produto com certificado de conformidade CERTIF.

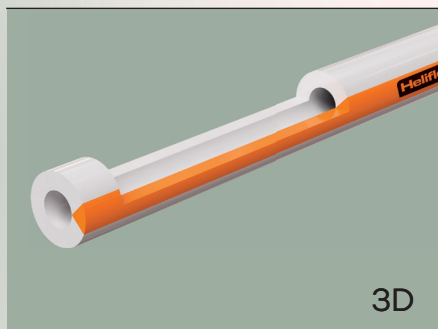

TECHNICAL FEATURES

Flexible; Low permeability to butane gas.



gas supply solutions

Description

Flexible PVC and TPE hose, reinforced with polyester, for supplying third-family gases, for a maximum working pressure of 30 bar (butane and propane). Manufactured according to standard EN 16436-1:2014+A3:2020, with CERTIF conformity certificate. Mainly used in connecting gas household appliances (propane and butane) for pressures up to 30 bar.

Application Areas:

Connection of domestic heating equipment to butane gas, for pressure up to 0.2 bar.
Chemicals conveyance; Industrial use; Domestic use.

Main features:

Class 1 flexible hose without reinforcement for supplying third family gases for maximum service pressure of 0.2 bar.

Temperature:

-30/+70°C

Presentation:

Colour: White with orange stripe.
Available in lengths of 30 metres.

Note Other colours, diameters and lengths available upon request.

Marking:

< Certif > **Heliflex** heligás EN 16436-1 - classe 1 - Ømm - 0,2 bar - Propane/BUTANE - Data Validade YYYY It dt



heligás butano | **140 189**

CODE				THICKNESS	WEIGHT	WORK PRESSURE	BURST PRESSURE
GROUP	INNER Ø	LENGTH	COLOR				
	mm	m		mm	kg/m	bar	bar
140 189	008	030	31	3,5	0,180	0,2	3,5

