




PRODUCT INFO

DESIGNATION
hidroflex anti-cloro

PRODUCT CODE
440 048

MATERIALS
Flexible and rigid PVC.

STANDARDS
Heliflex internal
requirements.
Manufactured according to
ISO 3994:2014, type 2.

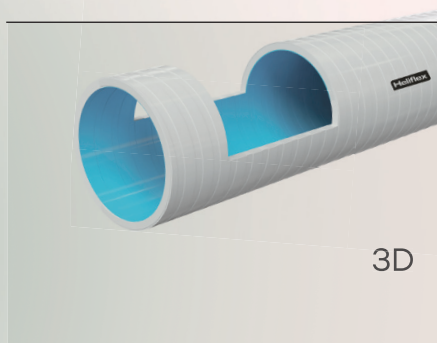

3D

TECHNICAL FEATURES
**Chlorine resistance;
Flexible;
Impact resistance.**



ensure tranquillity and safety in installation

Description

Spiral hose in flexible PVC with rigid PVC spiral reinforcement, smooth interior, and external calibration. With an inner layer 40% more resistant to chlorine. Manufactured according to ISO 3994:2004, type 2.

Application Areas:

Mainly for conveyance and circulation of chlorinated water for pools, bathtubs and whirlpool tubs.

Main features:

Flexible hose with rigid spiral and a special protective inner layer highly resistant to chlorine (chlorinated water).

Temperature:

-5/+50°C

Presentation:

Colour: White and blue inner layer.

Available in coils of 25 and 50 metres, depending on the diameters.*

Note: Other colours, diameters and lengths available upon request.

Marking:

Heliflex hidroflex anti-cloro ISO 3994:2014 tipo2 Ø(int)xØ(ext) mm XQYY lote data



hidroflex anti-cloro | **440 048**

CODE				OUTER Ø	THICKNESS	WEIGHT	WORKING PRESSURE	BURST PRESSURE	VACUUM	BEND RADIUS
GROUP	INNER Ø	LENGTH	COLOR							
	mm	m		mm	mm	kg/m	bar	bar	bar	mm
440 048	043	*	35	50,2	3,6	0,750	5,0	15,0	0,65	217
	055	*		63,4	4,2	1,030				275

