



PRODUCT INFO

DESIGNATION

hidroflex anti-térmitas

PRODUCT CODE


440 050

MATERIALS

Flexible and rigid PVC.

STANDARDS

Heliflex internal requirements, in accordance with ISO 3994:2014, type 2 standard. In accordance with method based on DIN 117:2013 for the Reticulitermes species.

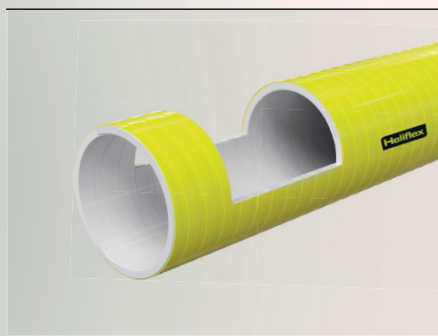

TECNICAL FEATURES

3D

Termite resistance;
Flexible;
Impact resistance.



ensure tranquillity and safety in installation

Description

Spiral hose in flexible PVC with rigid PVC spiral reinforcement, smooth interior, and external calibration. With an inner layer 40% more resistant to chlorine. Manufactured according to ISO 3994:2014, tipo 2..

Application Areas:

Mainly for conveyance and circulation of chlorinated water for pools, bathtubs and whirlpool tubs.

Main features:

Flexible hose with yellow outer layer especially formulated for repelling termites.

Temperature:

-5/+50°C

Presentation:

Colour: Yellow.

Available in coils of 25 and 50 metres, depending on the diameters.*

Note: Other colours, diameters and lengths available upon request.

Marking:

Heliflex hidroflex anti-térmitas ISO 3994:2014 tipo2 Ø(int)xØ(ext) mm XQYY lote data



hidroflex anti-térmitas | **440 050**

CODE				OUTER Ø	THICKNESS	WEIGHT	WORKING PRESSURE	BURST PRESSURE	VACUUM	BEND RADIUS
GROUP	INNER Ø	LENGTH	COLOR							
	mm	m		mm	mm	kg/m	bar	bar	bar	mm
440 050	043	*	35	50,2	3,6	0,700	5,0	15,0	0,65	217
	055	*		63,4	4,2	1,000				275

